


REV. STATUS SHEETS	REV. LTR.	A	REVISIONS			
	SHEET NO	1	LTR	DESCRIPTION	DATE	BY
			-	Released	1/30/97	JCL
			A	From Nickel to Silver	6/08/99	JCL

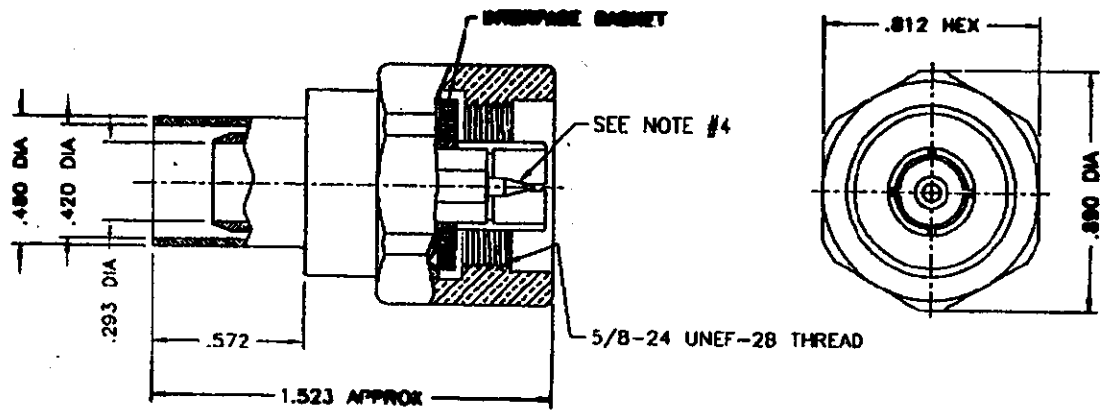

Materials & Finishes

Center Contact: Gold (50u") Plated Brass
 Outer Contact: Silver Plated (200u") Brass
 Other Metal Parts: Silver Plated (200u") Brass
 Dielectric: Teflon
 Gasket: Silicone Rubber
 Cable Attachment: Crimp

Electrical Properties

Impedance: 50 Ohms
 Working Voltage: 1000 Volts (RMS max)
 VSWR: 1.25:1 (max) up to 3 GHz
 Insertion Loss: <0.15 dB up to 3 GHz

Unless otherwise specified dimensions in inches. Tolerances are applicable when specified.	Approvals			TIMES MICROWAVE SYSTEMS Wallingford, CT 06492		
	Drawn	JCL	1/30/97	TC-400-NMH Type N Male Crimp Connector for LMR-400		
	Check					
	PrjMg					
	PrdMg			Size A	Code Ident 68999	Dwg.No. 3190-552
	QAMgr			Scale: NA	Sheet: 1 of 1	